

NEW PRODUCT NEWS

RHINO-RUSH



New Screw Clamping Type Boring Bar



RHINO•RUSH

New Screw Clamping Type Boring Bar

TaeguTec has expanded the RHINORUSH holder range to include screw clamping type boring bars.

The new range of boring bars with screw clamping is now available to suit 'C', 'T', 'V' and 'W' shape RHINORUSH inserts.



With the addition of the screw clamping type boring bar along with the current hook lever, T-holder and wedge clamp types, the RHINORUSH line of boring bars meets the needs of more demanding machining applications.

FEATURES

- Simple clamping structure
- Minimizes chip evacuation interference during internal machining
- Stability and durability during operation



S-SCLNR/L A-SCLNR/L

Screw type

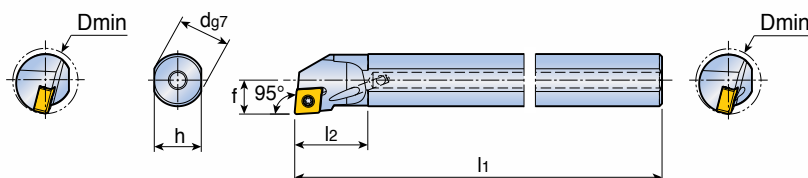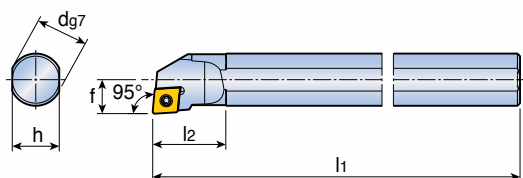




S-SCLNR/L

A-SCLNR/L


Approach angle	Designation	Dimension (mm)						Insert
		dg7	h	l1	l2	f	Dmin	
 95°	S16Q SCLNR/L 0904	16	15	180	25	11	20	CN...G 0904...
	S20Q SCLNR/L 0904	20	18	180	28	13	25	
	S20Q SCLNR/L 0904-D20	20	18	180	40	11	20	
 95°	A16Q SCLNR/L 0904	16	15	180	25	11	20	
	A20Q SCLNR/L 0904	20	18	180	28	13	25	

Spare parts


Designation	Screw	Sealing screw	Wrench		
					
S-SCLNR/L	TS 35083I/HG	-	T 10 (T-10/5)		
A-SCLNR/L	TS 35083I/HG	RSS M4	T 10 (T-10/5)		

S-STFNRL A-STFNRL



Screw type

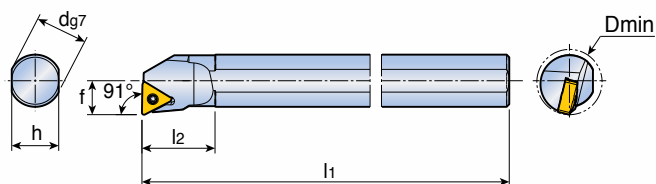

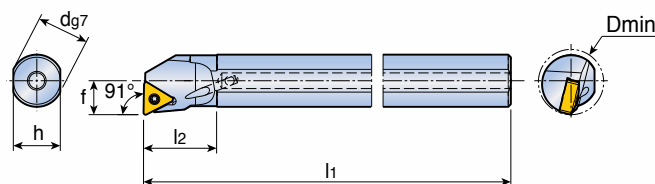


S-STFNRL



A-STFNRL


Approach angle	Designation	Dimension (mm)						Insert
		dg7	h	l1	l2	f	Dmin	
91°	S16Q STFNR/L 1304	16	15	180	25	11	20	TN...G 1304...
	S20Q STFNR/L 1304	20	18	180	28	13	25	
								
91°	A16Q STFNR/L 1304	16	15	180	25	11	20	
	A20Q STFNR/L 1304	20	18	180	28	13	25	
								

Spare parts


Designation	Screw	Sealing screw	Wrench		
					
S-STFNRL	TS 30080I/HG	-	T 9 (T-9/5)		
A-STFNRL	TS 30080I/HG	RSS M4	T 9 (T-9/5)		

S-STUNR/L A-STUNR/L

Screw type

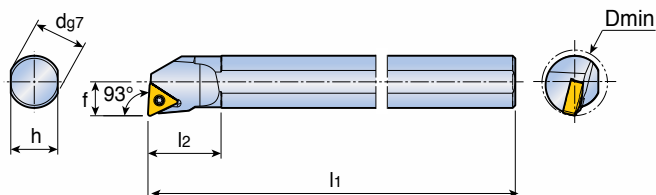

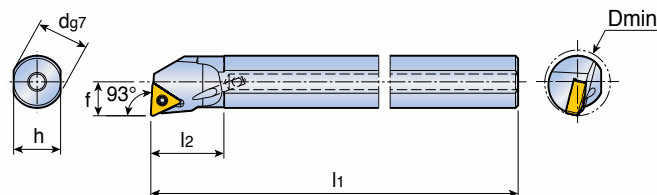


S-STUNR/L



A-STUNR/L


Approach angle	Designation	Dimension (mm)						Insert
		dg7	h	l1	l2	f	Dmin	
93°	S16Q STUNR/L 1304	16	15	180	25	11	20	TN...G 1304...
	S20Q STUNR/L 1304	20	28	180	28	13	25	
93°	A16Q STUNR/L 1304	16	15	180	25	11	20	
	A20Q STUNR/L 1304	20	18	180	28	13	25	

Spare parts


Designation	Screw	Sealing screw	Wrench		
					
S-STUNR/L	TS 30080I/HG	-	T 9 (T-9/5)		
A-STUNR/L	TS 30080I/HG	RSS M4	T 9 (T-9/5)		

A-SVLNR/L A-SVPCR/L

Screw type

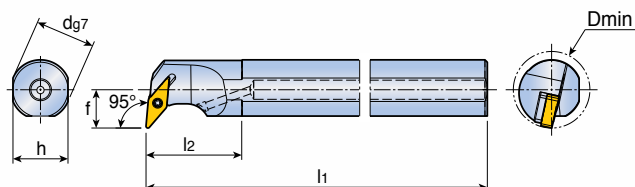

A-SVLNR/L

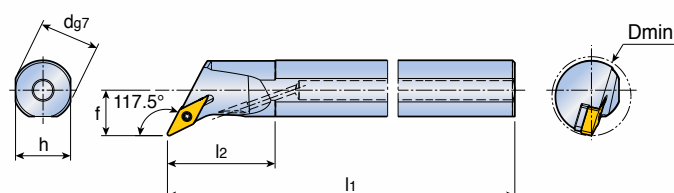

A-SVPCR/L


Approach angle	Designation	Dimension (mm)						Insert
		dg7	h	l1	l2	f	Dmin	
95°	A25T SVLNR/L 1304	25	23	300	40	16	31	VN...X 1304...
	A32T SVLNR/L 1304	32	30	300	45	20	38	
117.5°	A25T SVPCR/L 1304	25	23	300	45	19	33	
	A32T SVPCR/L 1304	32	30	300	47	26	44	

Spare parts


Designation	Screw	Shim	Shim screw	Wrench 1	Wrench 2
A-SVLNR/L	TS 30120I/HG	SSVN 2.523	TS 5030062S	T 9 (T-9/5)	L-W 3.5
A-SVPCR/L	TS 30120I/HG	SSVN 2.523	TS 5030062S	T 9 (T-9/5)	L-W 3.5

S-SWLNR/L A-SWLNR/L

Screw type

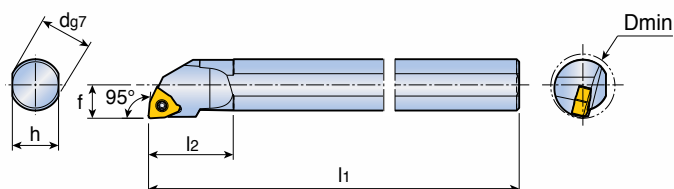

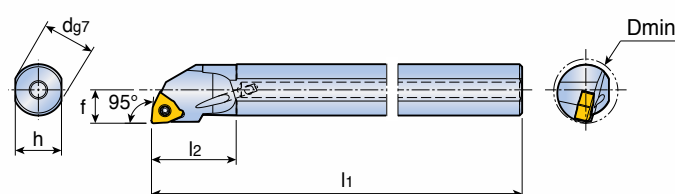


S-SWLNR/L



A-SWLNR/L

Approach angle	Designation	Dimension (mm)							Insert
		dg7	h	l1	l2	f	Dmin		
95°	S16Q SWLNR/L 0604	16	15	180	30	11	20	WN...X 0604...	
	S20Q SWLNR/L 0604	20	18	180	33	13	25		
95°	A16Q SWLNR/L 0604	16	15	180	30	11	20	WN...X 0604...	
	A20Q SWLNR/L 0604	20	18	180	33	13	25		

Spare parts

Designation	Screw	Sealing screw	Wrench		
					
S-SWLNR/L	TS 35083I/HG	-	T 10 (T-10/5)		
A-SWLNR/L	TS 35083I/HG	RSS M4	T 10 (T-10/5)		